



P-SERIES - P38 S

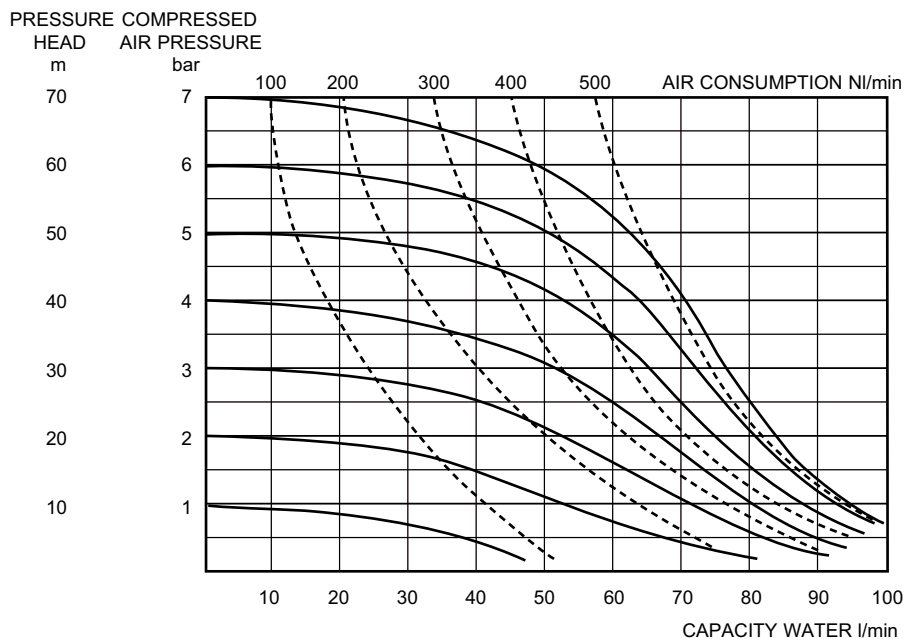

Please note that when a pump is fitted with Teflon® diaphragms, a capacity reduction of up to 15% may occur.

MATERIAL			SPECIFICATION						
Pump housing	Diaphragms	Valve balls	Max capacity	Max working pressure	Max Temp.	Liquid connection	Air connection	Particle size max.	Weight
SS316L	PTFE, Buna-N, EPDM, Vitron®	PTFE, Buna-N, EPDM, Vitron®	100 l/min	10 bar	100 °C	TC 1" SMS25 R 1" female	R 1/4" female	5 mm	14 kg

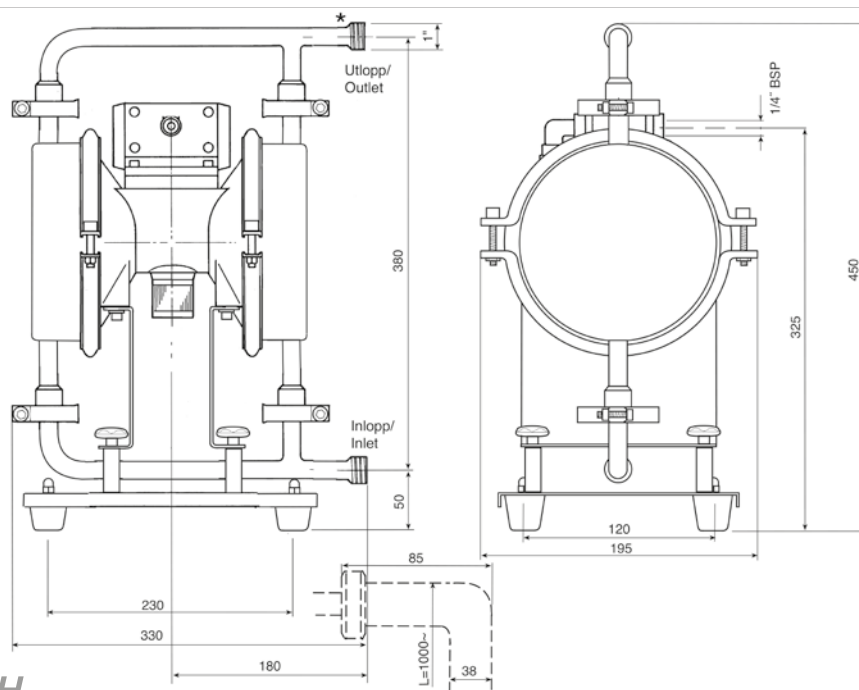

Colly FLOWTECH
INNOVATIV FLÖDESTEKNIK

Edition 2021-04-22

Postal address
 Colly Flowtech AB
 Grossistgatan 3
 553 02 JÖNKÖPING

Delivery address
 Colly Flowtech AB
 Grossistgatan 3
 553 02 JÖNKÖPING

Telephone
 +46 (0)36-18 11 60

E-mail
 info@collyflowtech.se
Web
 www.collyflowtech.se

VAT nr
 556506-7948

